
C200H - LK201 **Cable Part Number** 3G2C7 - LK201 C500 - CN221 - EU 3G2A6 - LK201 CV500 - LK201 (Port 1) AT Computer (9-pin) 25-pin SD **RD** SD RD 3 SG 5 SG 4 DTR RTS CTS 5 6 DSR **DTR 20** 7 RTS 8 CTS

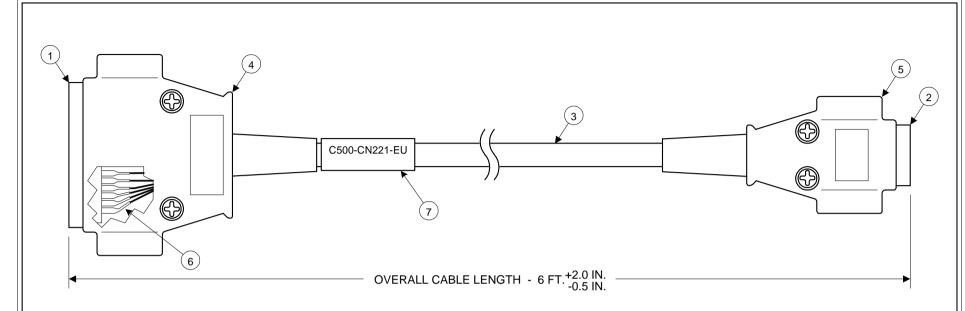

CABLE C500-CN221-EU

- 1. DB-25 MALE CONNECTOR WITH SOLDER CUPS
- 2. DE-9 FEMALE CONNECTOR WITH SOLDER CUPS
- 3. 3 CONDUCTOR, 24 AWG STRANDED, FOIL SHIELD, PVC JACKETED CABLE
- 4. OMRON DB-25 BACKSHEL W/ 2.6MM JACK SCREWS, P/N XM2S-2511
- 5. OMRON DE-9 BACKSHELL W/ #4-40 JACK SCREWS, P/N XM2S-0913
- 6. HEAT SHRINK TUBING TO COVER SOLDERED CONNECTION, BOTH ENDS
- 7. HEAT SHRINK TUBING, WHITE WITH PRINTED PART NUMBER AS SHOWN IN BLACK, 8 PT. HELVETICA. POSITION APPROXIMATELY AS SHOWN.

FROM #1	TO #2	
PIN	PIN	
TXD 2	2	RXD
RXD 3	3	TXD
*4 to 5	nc	
nc	*4 to 6	
nc	*7 to 8	
COM 7	5	COM
1 to SHIELD	nc	

* PIN TO PIN JUMPERS

-	-	-	-	-	APPROVAL	DATE	MATERIAL: -		C500 BASIC/ASCII/LINK TO	
-	-	-	-	-	DRWN OBA	11-2-94			IBM-AT CC	MPUTER CABLE
-	-	-	-	-	CHCKD	11234	FINISH: -		DRWG NO:	PFP0015A
-	-	-		-	-	-	TOLERANCE: -	UNITS: ENGLISH	FILE NAME: -	SIZE: A
-	-	-	-	-	APRVD			SCALE: NONE		Omron Electronics, Inc.
REV	DESCRIPTION	COS NO.	DATE	SGND	-	-		SHEET: 1 OF 1	OMRON	Omron Manufacturing of America

C200H - LK201 3G2C7 - LK201 3G2A6 - LK201 CV500 - LK201 (Port 1)



Cable Part Number C500 - CN222 - EU



SD 2 ______ 3 RD

RD 3 — 2 SD


SG 7 _____ 7 SG

RTS 4 — 6 DSR

CTS 5 ____ 20 DTR

DTR 20 ___ 4 RTS

- 5 CTS

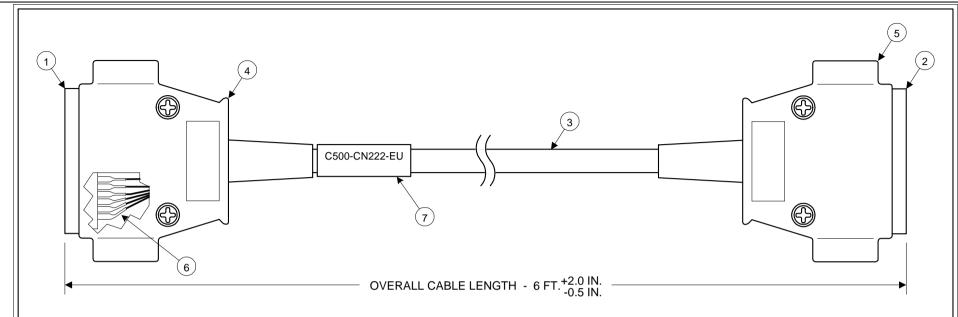

CABLE C500-CN222-EU


- 1. DB-25 MALE CONNECTOR WITH SOLDER CUPS
- 2. DB-25 FEMALE CONNECTOR WITH SOLDER CUPS
- 3. 3 CONDUCTOR, 24 AWG STRANDED, FOIL SHIELD, PVC JACKETED CABLE
- 4. OMRON DB-25 BACKSHELL W/ 2.6MM JACK SCREWS, P/N XM2S-2511
- 5. OMRON DB-25 BACKSHELL W/ #4-40 JACK SCREWS, P/N XM2S-2513
- 6. HEAT SHRINK TUBING TO COVER SOLERED CONNECTION, BOTH ENDS
- 7. HEAT SHRINK TUBING, WHITE WITH PRINTED PART NUMBER AS SHOWN IN BLACK, 8 PT. HELVETICA. POSITION APPROXIMATELY AS SHOWN.

FROM #1	TO #2
PIN	PIN
TXD 2	3 RXD
RXD 3	2 TXD
*4 to 5	nc
nc	*6 to 20
nc	*4 to 5
COM 7	7 COM
1 to SHIEL	D nc

^{*} PIN TO PIN JUMPERS

-	-	-	-	-	APPROVAL	DATE	MATERIAL: -		C500 BASIC/ASCII/LINK TO		
-	-	-	-	-	DRWN OBA	11-2-94			IBM-XT CC	MPUTER CABLE	
-	-	-	-	-	CHCKD	11234	FINISH: -		DRWG NO:	PFP0016A	
-	-	-	-	-	-	-	TOLERANCE: -	UNITS: ENGLISH	FILE NAME: -	SIZE: A	
-	-	-	-	-	APRVD			SCALE: NONE		Omron Electronics, Inc.	
REV	DESCRIPTION	COS NO.	DATE	SGND	-	-		SHEET: 1 OF 1	OMRON	Omron Manufacturing of America	

CV500 - LK201 (Port 2) CVM1 built-in Hostlink C200HS built-in Hostlink CQM1 built-in Hostlink IDSC built-in Hostlink




Cable Part Number C200HS - CN220 - EU



AT Computer (9-pin)

SD	2 —————————————————————————————————————	– 2	RD
RD	3 —	— 3	SD
SG	9 ————	— 5	SG
		_ 4	DTR
CTS	5	— 6	DSR
			RTS
		— 8	CTS

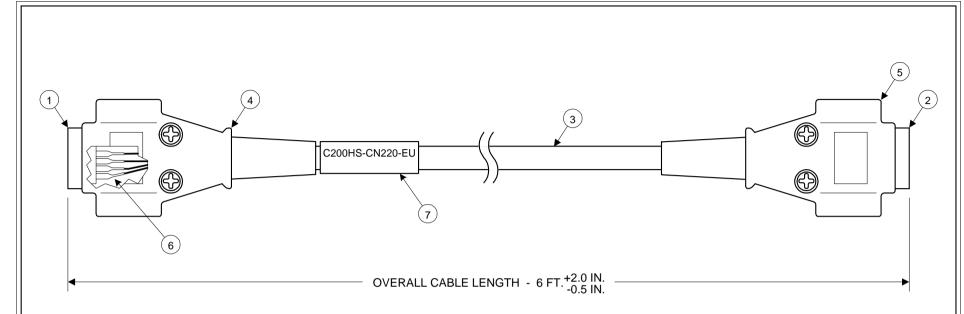

CABLE C200HS-CN220-EU


- 1. DE-9 MALE CONNECTOR WITH SOLDER CUPS
- 2. DE-9 FEMALE CONNECTOR WITH SOLDER CUPS
- 3. 3 CONDUCTOR, 24 AWG STRANDED, FOIL SHIELD, PVC JACKETED CABLE
- 4. OMRON DE-9 BACKSHELL W/ 2.6MM JACK SCREWS, P/N XM2S-0911
- 5. OMRON DE-9 BACKSHELL W/ #4-40 JACK SCREWS, P/N XM2S-0913
- 6. HEAT SHRINK TUBING TO COVER SOLDERED CONNECTION, BOTH ENDS
- 7. HEAT SHRINK TUBING, WHITE WITH PRINTED PART NUMBER AS SHOWN IN BLACK, 8 PT. HELVETICA. POSITION APPROXIMATELY AS SHOWN.

FROM #1	TO #2
PIN	PIN
TXD 2	2 RXD
RXD 3	3 TXD
*4 to 5	nc
nc	*4 to 6
nc	*7 to 8
SG 9	5 SG
1 to SHIELD	nc

* PIN TO PIN JUMPERS

-	-	-	-	-	APPROVAL	DATE	MATERIAL: -		HOST LINK PORT TO		
-	-	-	-	-	DRWN OBA	10-26-94			IBM-AT CC	MPUTER CABLE	
-	-	-	-	-	CHCKD	10-20-34	FINISH: -		DRWG NO:	PFP0010A	
-	-	-	-	-	-	-	TOLERANCE: -	UNITS: ENGLISH	FILE NAME: -	SIZE: A	
-	-	-	-	-	APRVD			SCALE: NONE		Omron Electronics, Inc.	
REV	DESCRIPTION	COS NO.	DATE	SGND	-	-		SHEET: 1 OF 1	OMRON	Omron Manufacturing of America	

CVM1 built-in Hostlink C200HS built-in Hostlink CQM1 built-in Hostlink




Cable Part Number C200HS - CN229 - EU



XT Computer (25-pin)

SD	2 —————————————————————————————————————	3		RD
RD	3 —	2		SD
SG	9 ————	7		SG
RTS	4	6	I	DSR
CTS	5	20)	DTR
		4		RTS
		<u></u>	(CTS

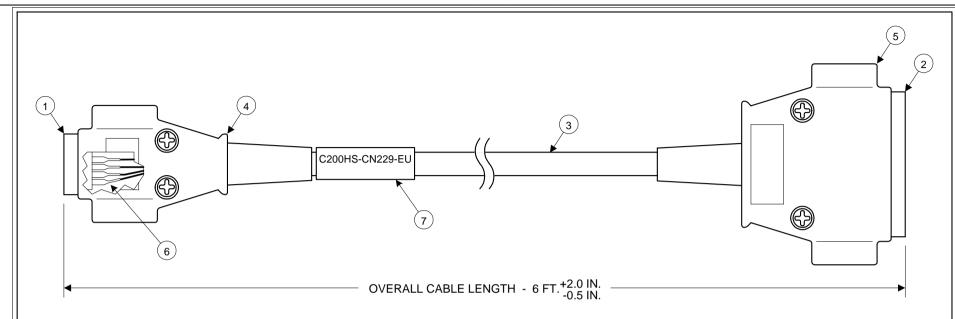


CABLE C200HS-CN229-EU


- 1. DE-9 MALE CONNECTOR WITH SOLDER CUPS
- 2. DE-25 FEMALE CONNECTOR WITH SOLDER CUPS
- 3. 3 CONDUCTOR, 24 AWG STRANDED, FOIL SHIELD, PVC JACKETED CABLE
- 4. OMRON DE-9 BACKSHELL W/ 2.6MM JACK SCREWS, P/N XM2S-0911
- 5. OMRON DE-25 BACKSHELL W/ #4-40 JACK SCREWS, P/N XM2S-2513
- 6. HEAT SHRINK TUBING TO COVER SOLDERED CONNECTION, BOTH ENDS
- 7. HEAT SHRINK TUBING, WHITE WITH PRINTED PART NUMBER AS SHOWN IN BLACK, 8 PT. HELVETICA. POSITION APPROXIMATELY AS SHOWN.

FF	ROM #1	TO #2	
	PIN	PIN	
TXD	2	3	RXD
RXD	3	2	TXD
,	*4 to 5	nc	
	nc	*6 to 20	
	nc	*4 to 5	
SG	9	7	SG
1 to	SHIELD	nc	
		· · · · · · · · · · · · · · · · · · ·	

* PIN TO PIN JUMPERS

	-	-	-	-	APPROVAL	DATE	MATERIAL: -		HOST LINK PORT TO		
-	-	-	-	-	DRWN				IBM-XT CC	MPUTER CABL	_E
-	-	_	_	_	OBA	10-26-94	FINISH: -				
					CHCKD			LINITO ENGLIQUE	DRWG NO:	PFP0011A	
	-	-	-	-	-	-	TOLERANCE: -	UNITS: ENGLISH	FILE NAME: -		SIZE: A
-	-	-	-	-	APRVD			SCALE: NONE		Omron Electronics, Inc	
REV	DESCRIPTION	COS NO.	DATE	SGND	<u> </u>	-		SHEET: 1 OF 1	OMRON	Omron Manufacturing	

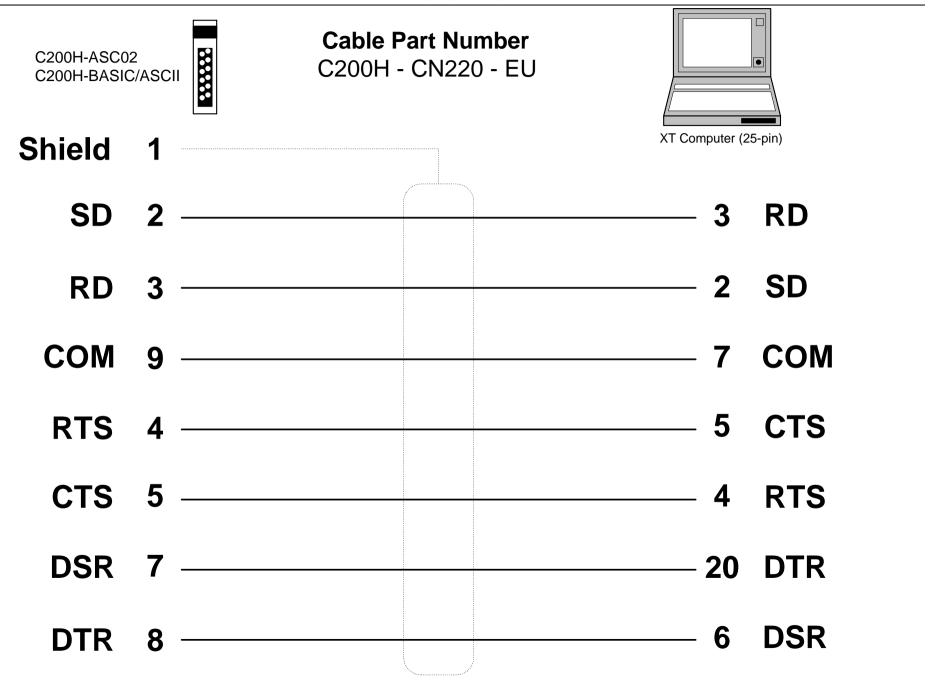

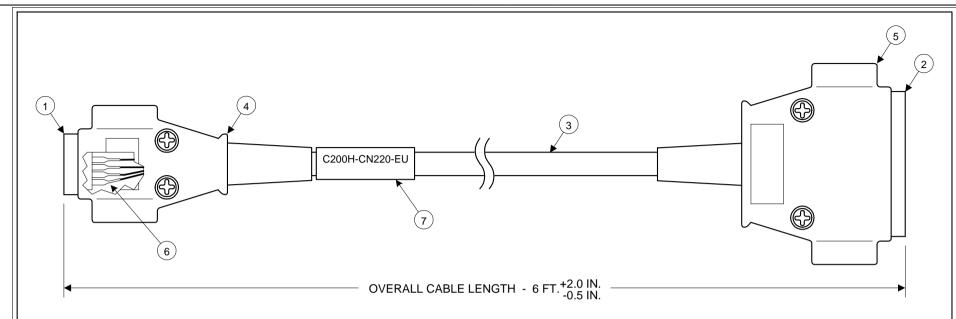



CABLE C200H-CN220-EU

- 1. DE-9 MALE CONNECTOR WITH SOLDER CUPS
- 2. DB-25 FEMALE CONNECTOR WITH SOLDER CUPS
- 3. 7 CONDUCTOR, 24 AWG STRANDED, FOIL SHIELD, PVC JACKETED CABLE
- 4. OMRON DE-9 BACKSHELL W/ 2.6MM JACK SCREWS, P/N XM2S-0911
- 5. OMRON DB-25 BACKSHELL W/ #4-40 JACK SCREWS, P/N XM2S-2513
- 6. HEAT SHRINK TUBING TO COVER SOLDERED CONNECTION, BOTH ENDS
- 7. HEAT SHRINK TUBING, WHITE WITH PRINTED PART NUMBER AS SHOWN IN BLACK, 8 PT. HELVETICA. POSITION APPROXIMATELY AS SHOWN.

FF	ROM #1	TO #2	
	PIN	PIN	
TXD	2	3	RXD
RXD	3	2	TXD
RTS	4	5	CTS
CTS	5	4	RTS
	6	nc	
DSR	7	20	DTR
DTR	8	6	DSR
COM	9	7	СОМ
1 to	SHIELD	nc	

-	-	-	-	-	APPROVAL	DATE	MATERIAL: -		C200H BASIC	ASCII MODULE TO
-	-	-	-	-	DRWN OBA	10-18-94			IBM-XT CC	MPUTER CABLE
-	-	-	-	-	_	10-16-94	FINISH: -		DRWG NO:	PFP0006B
В	ADDED ITEMS #6 AND 7	-	10-18-94	-	CHCKD -	_	TOLERANCE: -	UNITS: ENGLISH		
Α	ORIGINAL	-	7-14-94	-	APRVD		1022101102.	SCALE: NONE	FILE NAME: -	SIZE: A
REV	DESCRIPTION	COS NO.	DATE	SGND	- APRVD	-		SHEET: 1 OF 1	OMRON	Omron Electronics, Inc. Omron Manufacturing of America

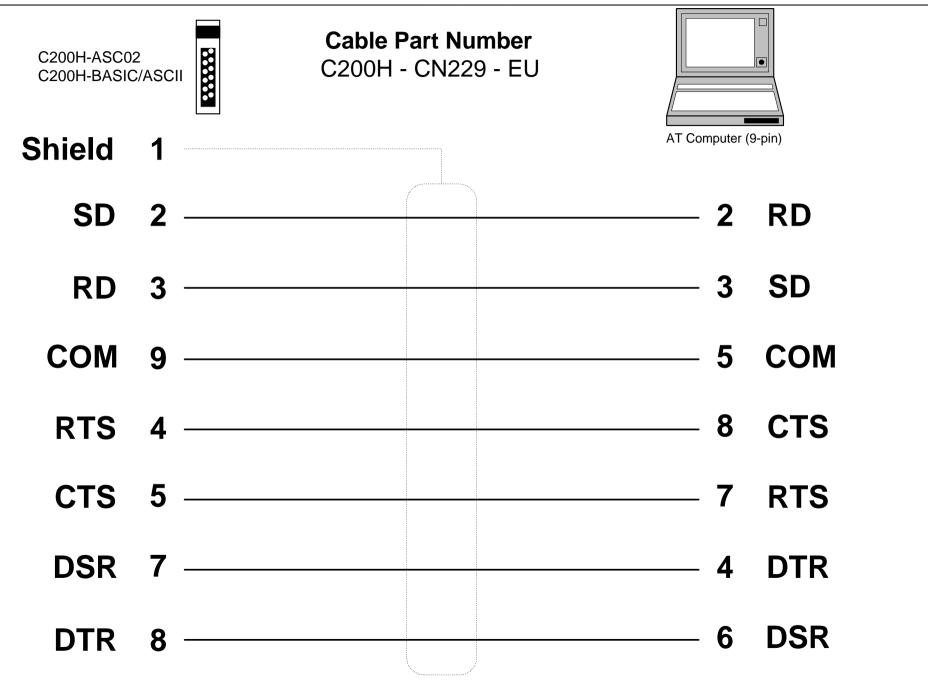

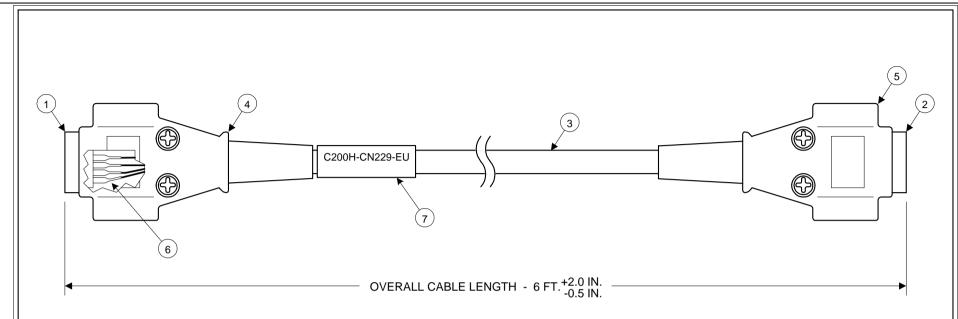


CABLE C200H-CN229-EU

- 1. DE-9 MALE CONNECTOR WITH SOLDER CUPS
- 2. DE-9 FEMALE CONNECTOR WITH SOLDER CUPS
- 3. 7 CONDUCTOR, 24 AWG STRANDED, FOIL SHIELD, PVC JACKETED CABLE
- 4. OMRON DE-9 BACKSHELL W/ 2.6MM JACK SCREWS, P/N XM2S-0911
- 5. OMRON DE-9 BACKSHELL W/ #4-40 JACK SCREWS, P/N XM2S-0913
- 6. HEAT SHRINK TUBING TO COVER SOLDERED CONNECTION, BOTH ENDS
- 7. HEAT SHRINK TUBING, WHITE WITH PRINTED PART NUMBER AS SHOWN IN BLACK, 8 PT. HELVETICA. POSITION APPROXIMATELY AS SHOWN.

FROM #1	TO #2
PIN	PIN
TXD 2	2 RXD
RXD 3	3 TXD
RTS 4	8 CTS
CTS 5	7 RTS
6	nc
DSR 7	4 DTR
DTR 8	6 DSR
COM 9	5 COM
1 to SHIELD) nc
•	

-	-	-	-	-	APPROVAL	DATE	MATERIAL: -		C200H BASIC/ASCII MODULE TO		
-	-	-	-	-	DRWN OBA	10-18-94			IBM-AT COMPUTER CABLE		
-	-	-	-	-	_	10-10-94	FINISH: -		DRWG NO:	PFP0005B	
В	ADDED ITEMS #6 AND 7	-	10-18-94	-	CHCKD -	_	TOLERANCE: -	UNITS: ENGLISH			
Α	ORIGINAL	-	7-14-94	-	APRVD		1022101102.	SCALE: NONE	FILE NAME: -	SIZE: A	
REV	DESCRIPTION	COS NO.	DATE	SGND	-	-		SHEET: 1 OF 1	OMRON	Omron Electronics, Inc. Omron Manufacturing of America	

NT11S, NT20S, NT600S, NT30, NT30C, NT620S/620C



9-pin

Cable Part Number C200H - CN229 - EU



AT Computer (9-pin)

Shield 1

SD 2 RD

RD 3 — 3 SD


COM 9 — 5 COM

RTS 4 — 8 CTS

CTS 5 _____ 7 RTS

DSR 7 — 4 DTR

DTR 8 — 6 DSR

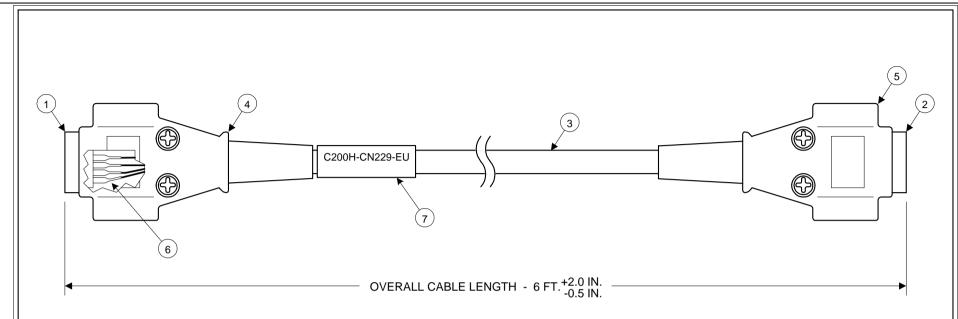

CABLE C200H-CN229-EU

- 1. DE-9 MALE CONNECTOR WITH SOLDER CUPS
- 2. DE-9 FEMALE CONNECTOR WITH SOLDER CUPS
- 3. 7 CONDUCTOR, 24 AWG STRANDED, FOIL SHIELD, PVC JACKETED CABLE
- 4. OMRON DE-9 BACKSHELL W/ 2.6MM JACK SCREWS, P/N XM2S-0911
- 5. OMRON DE-9 BACKSHELL W/ #4-40 JACK SCREWS, P/N XM2S-0913
- 6. HEAT SHRINK TUBING TO COVER SOLDERED CONNECTION, BOTH ENDS
- 7. HEAT SHRINK TUBING, WHITE WITH PRINTED PART NUMBER AS SHOWN IN BLACK, 8 PT. HELVETICA. POSITION APPROXIMATELY AS SHOWN.

FROM #1	TO #2
PIN	PIN
TXD 2	2 RXD
RXD 3	3 TXD
RTS 4	8 CTS
CTS 5	7 RTS
6	nc
DSR 7	4 DTR
DTR 8	6 DSR
COM 9	5 COM
1 to SHIELD) nc
•	

-	-	-	-	-	APPROVAL	DATE	MATERIAL: -		C200H BASIC/ASCII MODULE TO		
-	-	-	-	-	DRWN OBA	10-18-94			IBM-AT COMPUTER CABLE		
-	-	-	-	-	_	10-10-94	FINISH: -		DRWG NO:	PFP0005B	
В	ADDED ITEMS #6 AND 7	-	10-18-94	-	CHCKD -	_	TOLERANCE: -	UNITS: ENGLISH			
Α	ORIGINAL	-	7-14-94	-	APRVD		1022101102.	SCALE: NONE	FILE NAME: -	SIZE: A	
REV	DESCRIPTION	COS NO.	DATE	SGND	-	-		SHEET: 1 OF 1	OMRON	Omron Electronics, Inc. Omron Manufacturing of America	

NT11S, NT20S, NT600S, NT30, NT30C, NT620S/620C



9-pin

Cable Part Number C200H - CN220 - EU



Shield 1

SD 2 _____ 3 RD

RD 3 — 2 SD


COM 9 — 7 COM

RTS 4 ______ 5 CTS

CTS 5 — 4 RTS

DSR 7 _______ 20 DTR

DTR 8 — 6 DSR

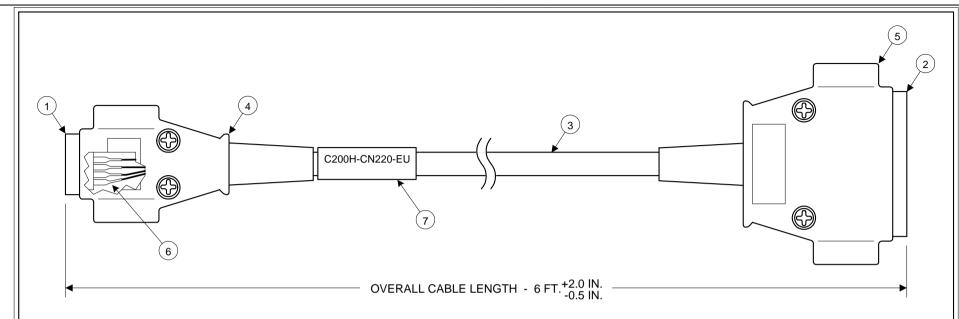

CABLE C200H-CN220-EU

- 1. DE-9 MALE CONNECTOR WITH SOLDER CUPS
- 2. DB-25 FEMALE CONNECTOR WITH SOLDER CUPS
- 3. 7 CONDUCTOR, 24 AWG STRANDED, FOIL SHIELD, PVC JACKETED CABLE
- 4. OMRON DE-9 BACKSHELL W/ 2.6MM JACK SCREWS, P/N XM2S-0911
- 5. OMRON DB-25 BACKSHELL W/ #4-40 JACK SCREWS, P/N XM2S-2513
- 6. HEAT SHRINK TUBING TO COVER SOLDERED CONNECTION, BOTH ENDS
- 7. HEAT SHRINK TUBING, WHITE WITH PRINTED PART NUMBER AS SHOWN IN BLACK, 8 PT. HELVETICA. POSITION APPROXIMATELY AS SHOWN.

ROM #1	TO #2	
PIN	PIN	
2	3	RXD
3	2	TXD
4	5	CTS
5	4	RTS
6	nc	
7	20	DTR
8	6	DSR
9	7	COM
SHIELD	nc	
	2 3 4 5 6 7 8	PIN PIN 2 3 3 2 4 5 5 4 6 nc 7 20 8 6 9 7

-	-	-	-	-	APPROVAL	DATE	MATERIAL: -		C200H BASIC/ASCII MODULE TO		
-	-	-	-	-	DRWN OBA	10-18-94			IBM-XT COMPUTER CABLE		
-	-	-	-	-	CHCKD	10 10 34	FINISH: -		DRWG NO:	PFP0006B	
В	ADDED ITEMS #6 AND 7	-	10-18-94	-	-	-	TOLERANCE: -	UNITS: ENGLISH	FILE NAME: -	SIZE: A	
A	ORIGINAL	-	7-14-94	-	APRVD			SCALE: NONE		Omron Electronics, Inc.	
REV	DESCRIPTION	COS NO.	DATE	SGND	-	-		SHEET: 1 OF 1	OMRON	Omron Manufacturing of America	

NT11S, NT20S, NT600S, NT30, NT30C, NT620/620S



9-pin male

Cable Part Number C200H - CN510 - EU CV500 - LK201 (Port 2) CVM1 built-in port C200HS built-in port CQM1 built-in port IDSC built-in port



9-pin male

CV500-LK201 (Port 2) CVM1 built-in port C200HS built-in port CQM1 built-in port IDSC built-in port




 TXD 2
 3 RXD

 RXD 3
 2 TXD

 SG 9
 9 SG

 RTS 4
 4 RTS

 CTS 5
 5 CTS

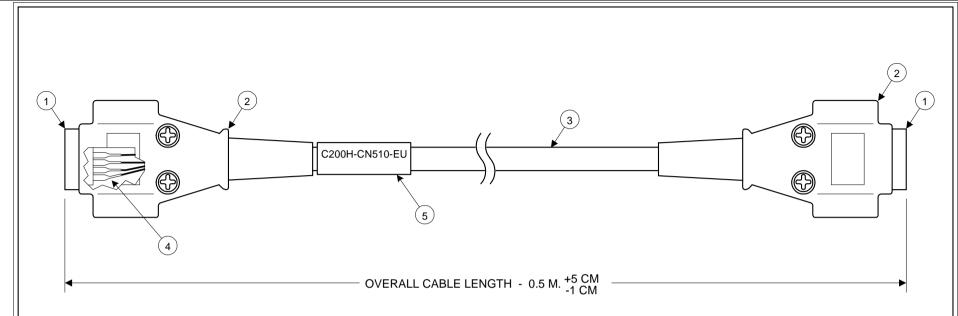

CABLE C200H-CN510-EU

- 1. DE-9 MALE CONNECTOR WITH SOLDER CUPS, QTY 2
- 2. OMRON DE-9 BACKSHELL W/ 2.6MM JACK SCREWS, QTY 2 OMRON CAT. NO. XM2S-0911, PIM NO. 4584252-0
- 3. 3 CONDUCTOR, 24 AWG STRANDED, FOIL SHIELD, PVC JACKETED CABLE*
- 4. HEAT SHRINK TUBING TO COVER SOLDERED CONNECTION, BOTH ENDS
- 5. HEAT SHRINK TUBING, WHITE WITH PRINTED PART NUMBER AS SHOWN IN BLACK, 8 PT. HELVETICA TYPE. POSITION APPROXIMATELY AS SHOWN.


F	FROM	TO	
	PIN	PIN	
TXD	2	3	RXD
RXD	3	2	TXD
	nc	4 to 5*	;
4	4 to 5*	nc	
+5	6	nc	
COM	9	9	COM
	nc	1 to SHIE	LD

* JUMPER PINS 4 TO 5 IN EACH CONNECTOR

-	-	-	-	-	APPROVAL	DATE	MATERIAL: -		S-SERIES PT to		
-	-	-	-	-	DRWN OBA	11-28-95			C-CV SERIES CPU PORT		
-	-	-	-	-	CHCKD	11 20 33	FINISH: -		DRWG NO:	PFP0017-A	
-	-	-	-	-	-	-	TOLERANCE: -	UNITS: ENGLISH	FILE NAME: -		SIZE: A
-	-	-	-	-	APRVD			SCALE: NONE		Omron Electronics, Inc	- , ,
REV	DESCRIPTION	COS NO.	DATE	SGND	-	-		SHEET: 1 OF 1	OMRON	Omron Manufacturing	

^{*} RECOMMENDED: CAROL #C0743, 6 CONDUCTOR CABLE

NT11S, NT20S, NT30, NT30C, NT600S, NT620C/620S




9-pin male


Cable Part Number C200H-519-EU (50 cm) C200H-329-EU (3M) C200H-529-EU (5M)

C500 - LK203 C200H - LK201 3G2A6 - LK201 3G2C7 - LK201 CV500 - LK201 (Port 1)



25-pin

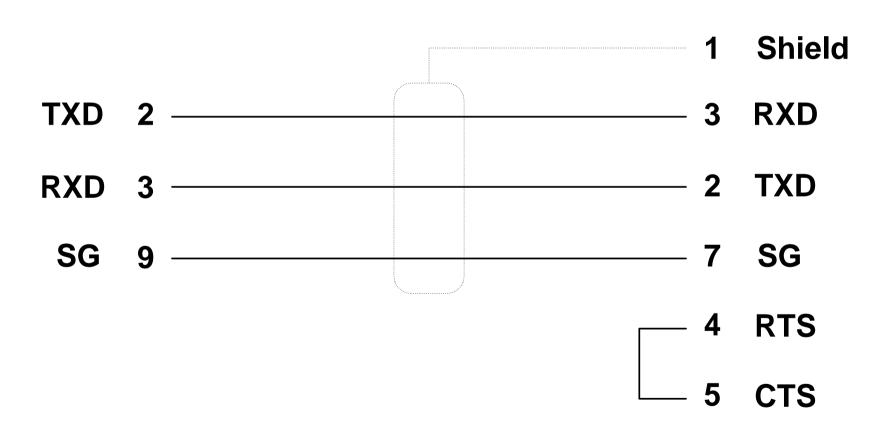

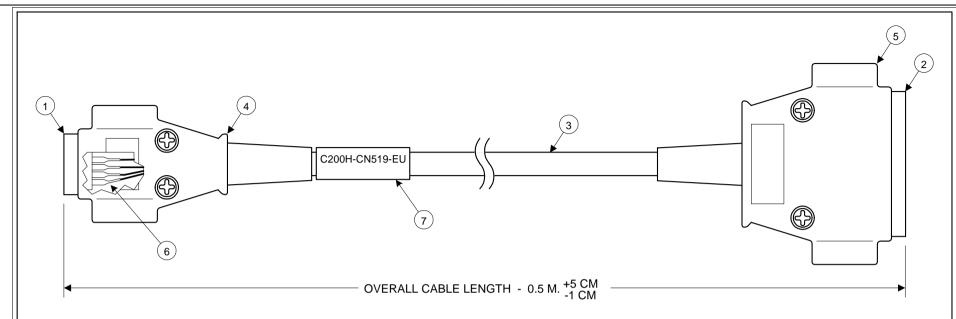

CABLE C200H-CN519-EU

- 1. DE-9 MALE CONNECTOR WITH SOLDER CUPS
- 2. DB-25 MALE CONNECTOR WITH SOLDER CUPS
- 3. 3 CONDUCTOR, 24 AWG STRANDED, FOIL SHIELD, PVC JACKETED CABLE
- 4. OMRON DE-9 BACKSHELL W/ 2.6MM JACK SCREWS, CAT. XM2S-0911, PIM 4584252-0
- 5. OMRON DB-25 BACKSHELL W/ 2.6MM JACK SCREWS, CAT. XM2S-2511, PIM 4584254-0
- 6. HEAT SHRINK TUBING TO COVER SOLDERED CONNECTION, BOTH ENDS
- 7. HEAT SHRINK TUBING, WHITE WITH PRINTED PART NUMBER AS SHOWN IN BLACK, 8 PT. HELVETICA TYPE. POSITION APPROXIMATELY AS SHOWN.


ROM #1	TO #2			
PIN	PIN			
2	3	RXD		
3	2	TXD		
nc	4 to 5*			
6	nc			
9	7	COM		
nc	1 to SHIELD			
	PIN 2 3 nc 6 9	PIN PIN 2 3 3 2 nc 4 to 5* 6 nc 9 7		

^{*} JUMPER PINS 4 TO 5

-	-	-	-	-	APPROVAL	DATE	MATERIAL: -		S-SERIES PT to		
-	-	-	-	-	DRWN OBA	11-28-95	FINIOU		C-CV SERIES HOST LINK MODULE		
-	-	-	-	-	CHCKD	11 20 30	FINISH: -		DRWG NO:	PFP0020-A	
-	-	-	-	-	-	-	TOLERANCE: -	UNITS: ENGLISH	FILE NAME: -	SIZE: A	
-	-	-	-	-	APRVD			SCALE: NONE		Omron Electronics, Inc.	
REV	DESCRIPTION	COS NO.	DATE	SGND	-	-		SHEET: 1 OF 1	OMRON	Omron Manufacturing of America	

^{*} RECOMMENDED: CAROL #C0743, 6 CONDUCTOR CABLE

CPM1 / CQM1 / C200H / IDSC




Cable Part Number


C200H - CN320 - EU C200H - CN520 - EU


(one-to-one link)

CPM1 / CQM1 / C200H / IDSC



9-pin male

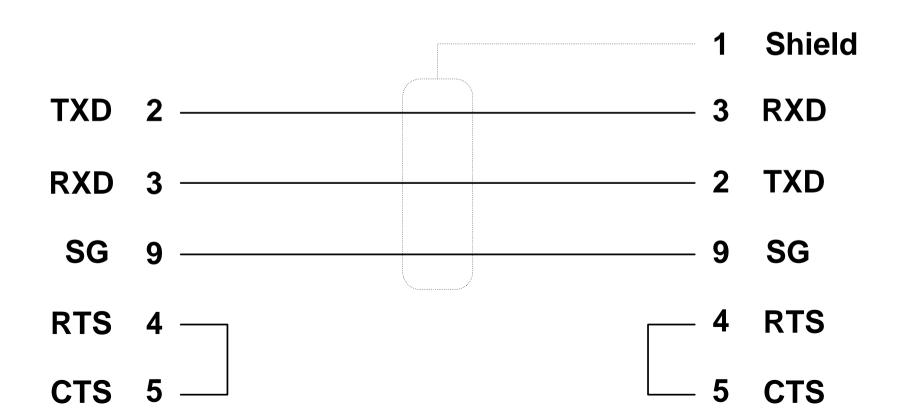

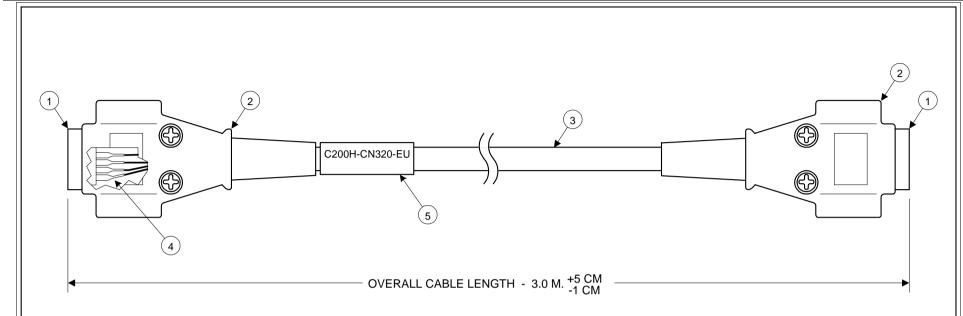

CABLE C200H-CN320-EU

- 1. DE-9 MALE CONNECTOR WITH SOLDER CUPS, QTY 2
- 2. OMRON DE-9 BACKSHELL W/ 2.6MM JACK SCREWS, QTY 2 OMRON CAT. NO. XM2S-0911, PIM NO. 4584252-0
- 3. 3 CONDUCTOR, 24 AWG STRANDED, FOIL SHIELD, PVC JACKETED CABLE*
- 4. HEAT SHRINK TUBING TO COVER SOLDERED CONNECTION, BOTH ENDS
- 5. HEAT SHRINK TUBING, WHITE WITH PRINTED PART NUMBER AS SHOWN IN BLACK, 8 PT. HELVETICA TYPE. POSITION APPROXIMATELY AS SHOWN.


F	FROM	TO	
	PIN	PIN	
TXD	2	3	RXD
RXD	3	2	TXD
	nc	4 to 5*	•
4	4 to 5*	nc	
+5	6	nc	
COM	9	9	COM
	nc	1 to SHIE	LD

* JUMPER PINS 4 TO 5 IN EACH CONNECTOR

-	-	-	-	-	APPROVAL	DATE	MATERIAL: -		S-SERIES PT to		
-	-	-	-	-	DRWN OBA	11-28-95			C-CV SERIES CPU PORT		
-	-	-	-	-	CHCKD	11 20 33	FINISH: -		DRWG NO:	PFP0018-A	
-	-	-	-	-	-	-	TOLERANCE: -	UNITS: ENGLISH	FILE NAME: -		SIZE: A
-	-	-	-	-	APRVD			SCALE: NONE		Omron Electronics, Inc.	
REV	DESCRIPTION	COS NO.	DATE	SGND	-	-		SHEET: 1 OF 1	OMRON	Omron Manufacturing o	

^{*} RECOMMENDED: CAROL #C0743, 6 CONDUCTOR CABLE


NT11S, NT20S, NT30, NT30C, NT600S, NT620C/620S




9-pin male


Cable Part Number

C200H - CN320 - EU C200H - CN520 - EU CV500 - LK201 (Port 2) CVM1 built-in port C200HS built-in port CQM1 built-in port CPM1- CIF01 IDSC built-in port



9-pin male

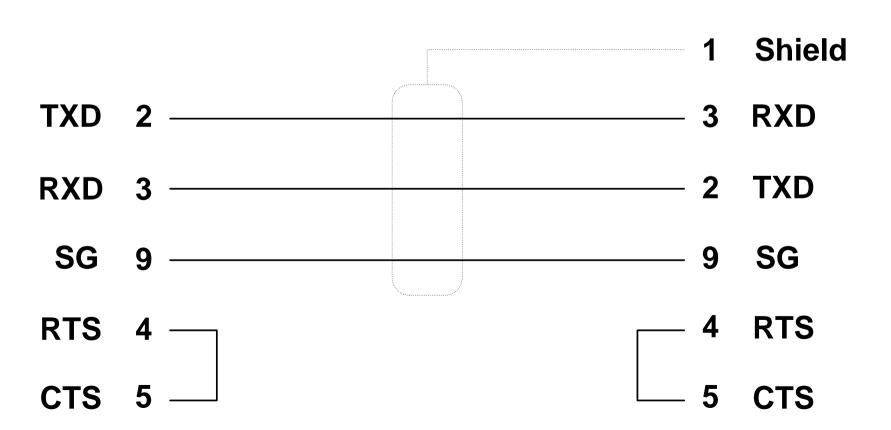

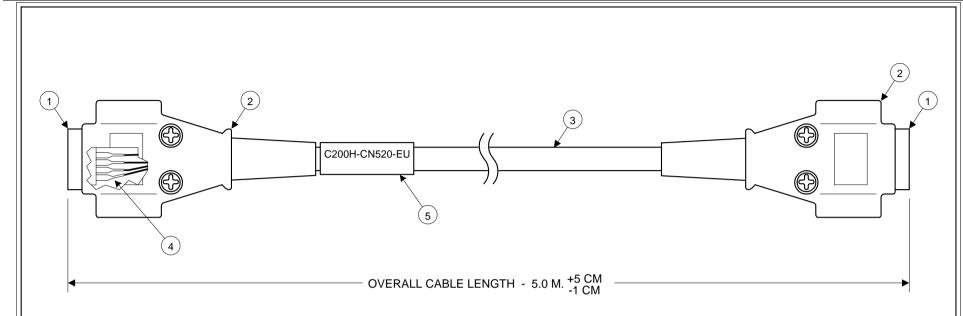

CABLE C200H-CN520-EU

- 1. DE-9 MALE CONNECTOR WITH SOLDER CUPS, QTY 2
- 2. OMRON DE-9 BACKSHELL W/ 2.6MM JACK SCREWS, QTY 2 OMRON CAT. NO. XM2S-0911, PIM NO. 4584252-0
- 3. 3 CONDUCTOR, 24 AWG STRANDED, FOIL SHIELD, PVC JACKETED CABLE*
- 4. HEAT SHRINK TUBING TO COVER SOLDERED CONNECTION, BOTH ENDS
- 5. HEAT SHRINK TUBING, WHITE WITH PRINTED PART NUMBER AS SHOWN IN BLACK, 8 PT. HELVETICA TYPE. POSITION APPROXIMATELY AS SHOWN.


F	FROM	TO	
	PIN	PIN	
TXD	2	3	RXD
RXD	3	2	TXD
	nc	4 to 5*	•
4	4 to 5*	nc	
+5	6	nc	
COM	9	9	COM
	nc	1 to SHIE	LD

* JUMPER PINS 4 TO 5 IN EACH CONNECTOR

-	-	-	-	-	APPROVAL	DATE	MATERIAL: -		S-SERIES PT to		
-	-	-	-	-	DRWN OBA	11-28-95			C-CV SERIES CPU PORT		
-	-	-	-	-	CHCKD		FINISH: -		DRWG NO:	PFP0019-A	
-	-	-	-	-	-	-	TOLERANCE: -	UNITS: ENGLISH	FILE NAME: -		SIZE: A
-	-	-	-	-	APRVD			SCALE: NONE		Omron Electronics, Inc	- ' '
REV	DESCRIPTION	COS NO.	DATE	SGND	-	-		SHEET: 1 OF 1	OMRON	Omron Manufacturing	

^{*} RECOMMENDED: CAROL #C0743, 6 CONDUCTOR CABLE

CV500 - LK201 (Port 2) CVM1 built-in port C200HS built-in port CQM1 built-in port CPM1- CIF01 IDSC built-in port




9-pin male

Cable Part Number


C200H - CN320 - EU


C200H - CN520 - EU

PT (NT600M - LK201)



9-pin male

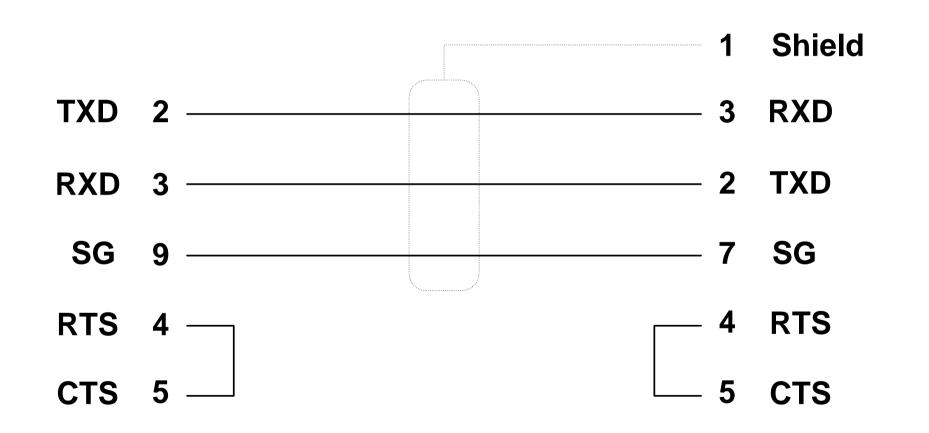

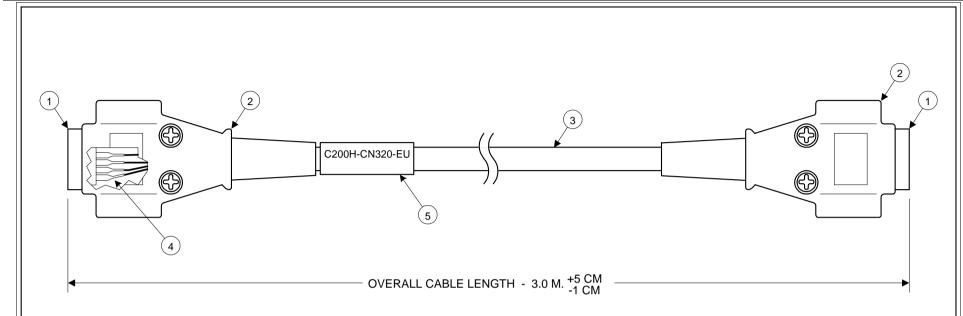

CABLE C200H-CN320-EU

- 1. DE-9 MALE CONNECTOR WITH SOLDER CUPS, QTY 2
- 2. OMRON DE-9 BACKSHELL W/ 2.6MM JACK SCREWS, QTY 2 OMRON CAT. NO. XM2S-0911, PIM NO. 4584252-0
- 3. 3 CONDUCTOR, 24 AWG STRANDED, FOIL SHIELD, PVC JACKETED CABLE*
- 4. HEAT SHRINK TUBING TO COVER SOLDERED CONNECTION, BOTH ENDS
- 5. HEAT SHRINK TUBING, WHITE WITH PRINTED PART NUMBER AS SHOWN IN BLACK, 8 PT. HELVETICA TYPE. POSITION APPROXIMATELY AS SHOWN.

F	FROM	TO	
	PIN	PIN	
TXD	2	3	RXD
RXD	3	2	TXD
	nc	4 to 5*	•
4	4 to 5*	nc	
+5	6	nc	
COM	9	9	COM
	nc	1 to SHIE	LD

* JUMPER PINS 4 TO 5 IN EACH CONNECTOR

-	-	-	-	-	APPROVAL	DATE	MATERIAL: -		S-SERIES PT to		
-	-	-	-	-	DRWN OBA	11-28-95			C-CV SERIES CPU PORT		
-	-	-	-	-	CHCKD	11 20 33	FINISH: -		DRWG NO:	PFP0018-A	
-	-	-	-	-	-	-	TOLERANCE: -	UNITS: ENGLISH	FILE NAME: -		SIZE: A
-	-	-	-	-	APRVD			SCALE: NONE		Omron Electronics, Inc.	
REV	DESCRIPTION	COS NO.	DATE	SGND	-	-		SHEET: 1 OF 1	OMRON	Omron Manufacturing of	

^{*} RECOMMENDED: CAROL #C0743, 6 CONDUCTOR CABLE